


Face Smart Plus - Visible Light Indoor Facial & Palm Recognition

PLF-20K-VLP

www.pollo.net.au

info@pollo.net.au

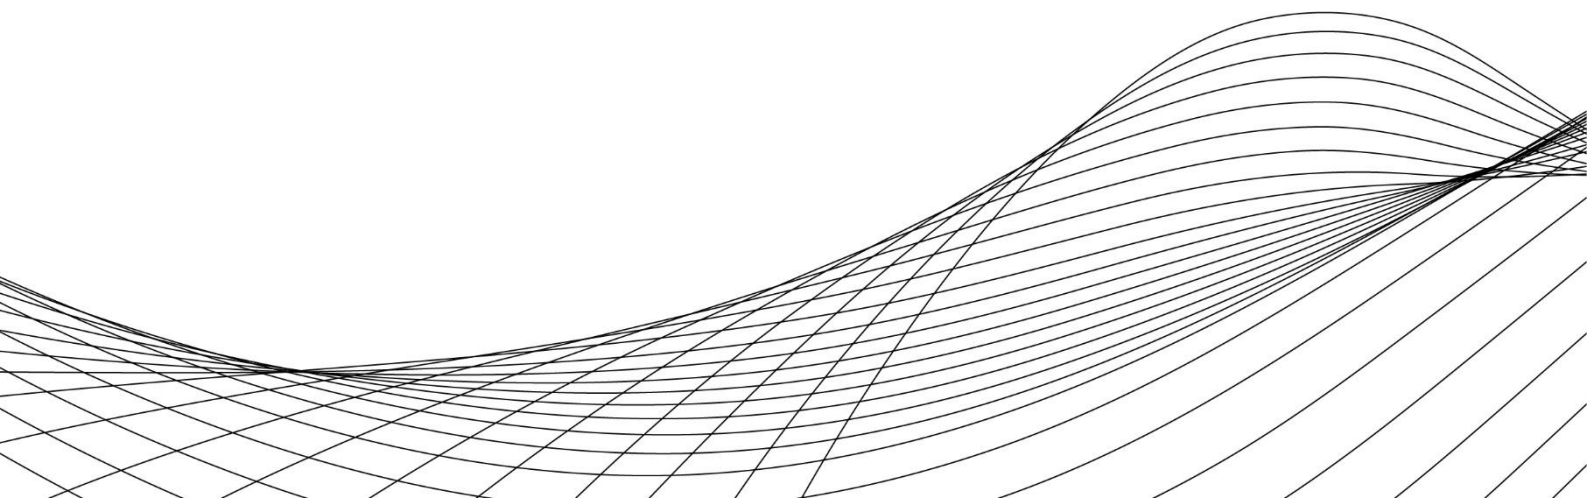

Face Smart Plus - Visible Light Indoor Facial & Palm Recognition

PLF-20K-VLP



- ❖ Advanced biometric access control terminal
- ❖ Dual-core 1.5GHz CPU and stable Linux OS
- ❖ Equipped with a 8-inch TFT IPS touch screen for clear visuals
- ❖ Built-in dual (binocular) 2MP camera enabling face recognition and live detection
- ❖ Memory configuration of 512MB RAM and 8GB ROM
- ❖ Supports nighttime filling light
- ❖ Support photosensitive sensor for low-light environments
- ❖ Uses dynamic face detection and tracking algorithms
- ❖ High-speed recognition with ~20ms face detection
- ❖ 300ms feature extraction, and ~1s comparison
- ❖ Supports face recognition scene photo saving
- ❖ Multiple authentication face, palm vein, fingerprint, card, and password
- ❖ Large capacity support for 20,000 users
- ❖ 20,000 faces, 5,000 palms, and 10,000 fingerprints
- ❖ Supports 20,000 cards and passwords
- ❖ Stores up to 200,000 transaction logs for attendance
- ❖ Recognition distance ranges from 0.5 to 2 meters
- ❖ Live detection optimized at 0.5–1 meter
- ❖ Designed for indoor use with wide operating range from –30°C to +60°C
- ❖ Supports built-in WiFi, along with TCP/IP, USB 2.0
- ❖ Compatible with external ID/IC card readers
- ❖ Supports serial port, RS485, RS232 and Wiegand 26/34
- ❖ Full access control I/O including electric lock, door sensor, exit button
- ❖ Supports LAN-based device deployment
- ❖ Allows screen display content and recognition

Specifications:


Hardware	CPU	Dual-Core 1.5GHZ
	Operating system	LINUX
	LCD display	8" TFT IPS touch color screen (800*1280)
	Camera	Binocular camera (Dual) 2 Megapixel
	RAM	512MB
Capacity	ROM	8G
	User	20,000
	Face	20,000
	Palm	5,000
	Fingerprint	10,000
Operating	Password	20,000
	Cards	20,000
	Logs	200,000
	Power supply	DC12V / 2A
	Recognition distance	0.5-2 meters (Live detection: 0.5~1meter)
Communication	Operating temperature	-30 ° C - + 60 ° C
	Working humidity	10%~90%
	Use environment	Indoor
	Communication mode	TCP/IP, USB 2.0, U-disk, WiFi
	Access Control Output	Wiegand26/34, RS485, door magnetism, electric lock, open button, electric bell, door bell, SPK

Dimensions:



Application:

Type 1 :

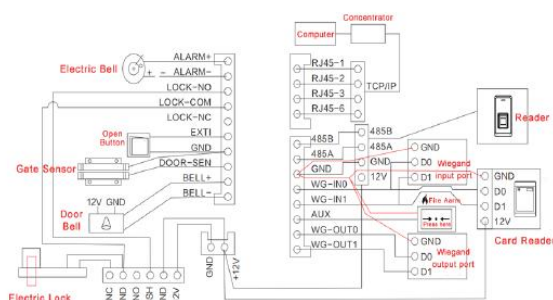

Type 2 :

