



2 Megapixel 4 Channel DVR with 1 HDD Slot

PLC-1204H1/PM

www.pollo.net.au

info@pollo.net.au



HD Output



DDNS



Network



PTZ



Audio



MIC



Mobile



CMS




USB



Mouse



E-mail

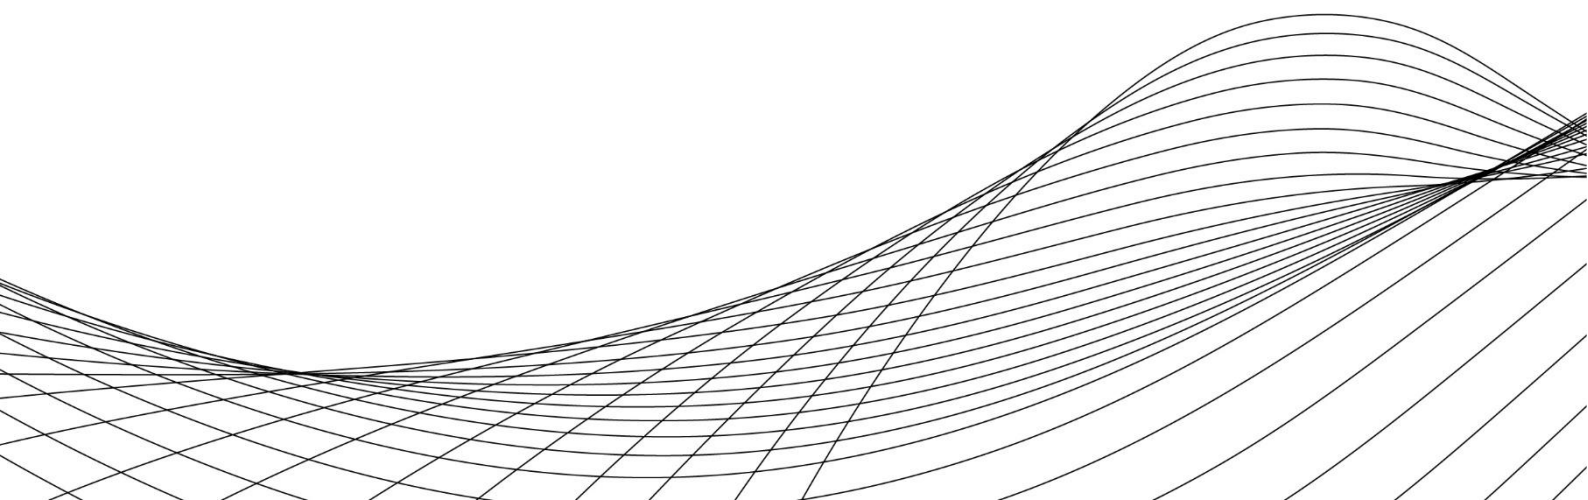

Overview:



PLC-1204H1/PM is a 04 Channel 1080P high-definition DVR with ability to connect analog and IP cameras simultaneously, which adopts the standard H.265 high profile compression format and the advanced SOC technique to ensure real time recording in each channel and realize outstanding robustness of the system. **PLC-1204H1/PM** supports 4 CH video input, 1 CH audio input, simultaneous 4 CH playback. The series of product can meet different security requirements of home, financial, commerce, enterprise, transportation and government, etc.

Key Features:

- ✔ Supports 4-channel analog cameras (TVI / AHD / CVI) up to 1080P
- ✔ Supports 2-channel IP cameras up to 1080P
- ✔ Uses H.265 high-profile compression
- ✔ User-friendly GUI with mouse-based operation
- ✔ Multiple recording modes: Manual, Schedule, Motion, AI
- ✔ 4-channel simultaneous playback
- ✔ Easy search options: Time, Event, Time-slice, Tag
- ✔ Backup via USB, network, and other methods
- ✔ Pentaplex operation: live view, record, playback, backup
- ✔ Supports network protocols: DHCP, DDNS, PPPoE
- ✔ Remote access via Web or CMS
- ✔ Dual-stream technology for HD local recording
- ✔ User authorization, log checking, and system status monitoring
- ✔ 1080P HDMI output for high-resolution display
- ✔ PTZ control with up to 255 presets and 8 auto cruises
- ✔ Supports NAT and QR code scanning for easy mobile setup
- ✔ Mobile surveillance on Android and iOS smartphones

Specifications:

Model	PLC-1204H1/PM
System	Embedded Linux
Analog Video Input	BNC × 4, BNC interface (1.0Vp-p; 75Ω), TVI/ AHD/CVI: 1080P/ 1080P Lite/ 720P/ 720P Lite/WD1
IP Video Input	2CH, up to 2MP@30fps
Total Input	6CH
Video Output	HDMI × 1 :1920 × 1080 / 1280 × 1024 / 1024 × 768 VGA × 1: 1920 × 1080 / 1280 × 1024 / 1024 × 768
Video Compression	H.264/H.265
Multi-screen Display	1/4/6/9
Audio Input	RCA ×1
Audio Output	RCA × 1 (linear, 600Ω)
Two-way audio	Take up channel one audio input
Audio Compression	G.711(U/A)
Recording Resolution	1080P Lite/ 720P/ 720P Lite/WD1
Recording Frame Rate	Analog Channel: 4CH DVR: 1080P Lite/720P/WD1: 25fps (PAL)/30fps (NTSC) 8CH DVR: 1080P Lite/720P/WD1: 25fps (PAL)/30fps (NTSC) (only CH 1 supports) 1080P Lite/720P/WD1: 12fps (PAL)/15fps (NTSC) (other channels support) 720P Lite: 25fps(PAL) / 30fps (NTSC) IP Channel: 25fps(PAL) / 30fps (NTSC)
Recording Bit Rate	32Kbps ~ 4Mbps
Playback	4 CH
Playback Search	Time slice / time / event / tag search
Play back Smart Search	Highlight colours to display the camera record in a certain period of time, different colours refer to different record events
Play back Function	Play, pause, FF, FB, digital zoom, etc.
Alarm Mode	Manual, motion, exception, smart event
Alarm Input	No
Alarm Output	No
Network Interface	RJ 45 100Mbps × 1
Network Protocol	TCP / IP, PPPoE, DHCP, DNS, DDNS, UPnP, HTTP, HTTPS, NTP, SMTP
Incoming Bandwidth	10Mbps
Outgoing Bandwidth	30Mbps
Client Connection	Max. 5 users' access
Mobile Device OS	iOS, Android
Storage HDD	SATA× 1, up to 8TB
Local Backup	U disk, USB mobile HDD
Network Backup	Yes
RS 485	No
USB	USB 2.0 × 2
Remote Controller	No
Power Supply	DC12V / 1.5A

Consumption	≤ 5W (without HDD)
Dimensions(mm)	255 × 222 × 42 (W × D × H)
Working Environment	-10~50°C, 10%~90% (humidity)
Certificate	CE, FCC
Environment Protection	Directive EU RoHS, WEEE, REACH

Dimensions:

