



5 Megapixel 32 Channel DVR with 4 HDD Slots

PLC-1532H4/PM

www.pollo.net.au

info@pollo.net.au



H.265



DDNS



Network



PTZ



Audio



MIC



Mobile



CMS




USB



Mouse



E-mail

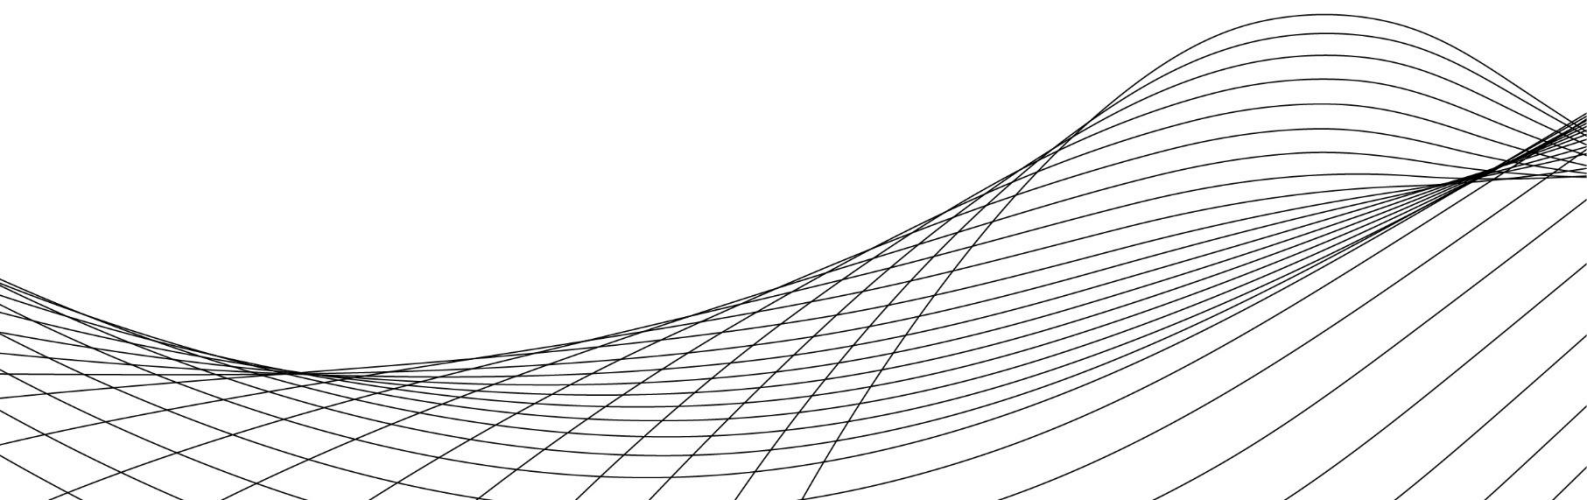



Overview:

PLC-1532H4/PM supports 5MP analog and IP video input simultaneously. It adopts the standard H.265 high profile compression format and the advanced SOC technique to ensure real time recording in each channel and realize outstanding robustness of the system. **PLC-1532H4/PM** supports 32 CH analog video input, 16 CH audio input and simultaneous 16 CH playback. The series of product can meet different security requirements of home, financial, commerce, enterprise, transportation and government, etc.

Key Features:

- 🔪 32-channel analog input (TVI / AHD / CVI) up to 5MP
- 🔪 Supports 8-channel IP cameras up to 5MP
- 🔪 16 analog channels can be switched to 16 IP channels
- 🔪 H.265 high-profile compression
- 🔪 User-friendly GUI with mouse-based operation
- 🔪 Recording modes: Manual, Scheduled, Sensor, Motion, AI
- 🔪 16-channel simultaneous playback
- 🔪 Search options: Time, Time-slice, Event, Tag, Smart Search
- 🔪 Fast and flexible backup via USB or network
- 🔪 Pentaplex operation: live view, record, playback
- 🔪 Network protocols supported: DHCP, DDNS, PPPoE
- 🔪 Remote access via Web Client or CMS
- 🔪 Supports multiple users online simultaneously
- 🔪 User authorization, log review, and device status monitoring
- 🔪 1080P HDMI output for high-resolution display
- 🔪 PTZ control with up to 255 presets and 8 auto-cruise modes
- 🔪 Supports NAT and QR-code setup for easy mobile access
- 🔪 Mobile surveillance on Android and iOS smartphones

Specifications:

Model	PLC-1532H4/PM
System OS	Embedded Linux
Analog Video Input	BNC × 32 BNC interface (1.0Vp-p; 75Ω) TVI/AHD/CVI : 5MP@20fps; 4MP/3MP/1080P/720P/WD1@25fps/30fps (live)
IP Video Input	8CH (up to 24CH) Up to 5MP@30fps
Total Input	40CH
Output	HDMI × 1 : 1920 × 1080 / 1280 × 1024 / 1024 × 768 VGA × 1 : 1920 × 1080 / 1280 × 1024 / 1024 × 768 BNC × 1 : CVBS (used as the main or spot output)
Compression	H.264/H.265/H.265+
Multi-screen Display	1/4/6/8/9/13/16/25/32/36
Audio Input	RCA × 16
Audio Output	RCA × 1 (linear, 600Ω)
Two-way audio	Take up channel one audio input
Compression	G.711(U/A)
Resolution	5MP Lite/4MP Lite / 1080P/1080P Lite/720P/WD1/D1
Frame Rate	Analog Channel: 5MP Lite@10fps (PAL / NTSC); 4MP Lite/1080P@12fps(PAL) / 15fps (NTSC); 1080P Lite/720P/WD1/D1@25fps (PAL) / 30fps (NTSC) IP Channel: 25fps (PAL) / 30fps (NTSC)
Bit Rate	32Kbps ~ 5Mbps
Playback	16CH
Search	Time slice / time / event / tag /smart search
Smart Search	Highlight colors to display the camera record in a certain period of time, different colors refer to different record events
Function	Play, pause, FF, FB, digital zoom, etc.
Mode	Manual, motion, exception, sensor, smart event
Alarm Input	16CH
Alarm Output	4CH
Smart Motion Detection Performance	16CH
Perimeter Protection Performance	1CH
Interface	RJ 45 1000Mbps × 1
Protocol	TCP / IP, PPPoE, DHCP, DNS, DDNS, UPnP, HTTP, HTTPS, NTP, SMTP, etc.
Incoming Bandwidth	40Mbps
Outgoing Bandwidth	160Mbps
Client Connection	Max. 15users access
OS	iOS, Android
HDD	SATA×4, up to 10TB per HDD; E-SATA×1
Local Backup	U disk, USB mobile HDD
Network Backup	Yes

RS 485	Yes (full-duplex), connect to PTZ or keyboard
USB	USB 2.0 × 1; USB 3.0 × 1
Remote Controller	Optional
Power Supply	ATX-250W
Consumption	≤ 30W (without HDD)
Dimensions(mm)	440 × 390 × 70 (W × D × H)
Working Environment	-10~50°C, 10%~90% (humidity)
Certificate	CE, FCC
Environmental Protection	Comply with Directive EU RoHS, WEEE, REACH

Dimensions:

