




5 Megapixel IR Varifocal FHD Bullet Camera

PLC-325M-MZ-IR5/PM

www.pollo.net.au

info@pollo.net.au



Sensor



Min.
illumination



BLC



Day&Night




Auto WB



Sync



IP67


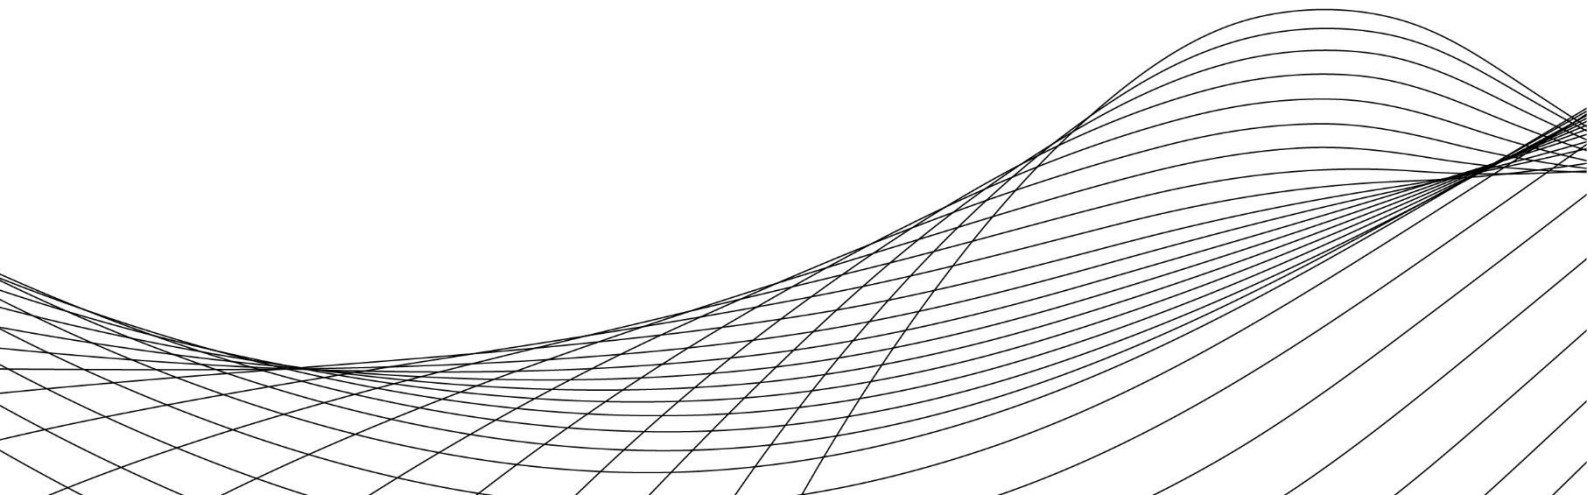


Key Features:

- ❖ 1 / 2.5" CMOS Image Sensor
- ❖ 2560 x 1936 Pixels (5MP) Resolution
- ❖ AHD / TVI / CVI / CVBS Standard Video Output
- ❖ 50-meter IR Night View Range @ 0 Lux
- ❖ Support OSD Menu
- ❖ Varifocal Lens 2.8mm~12mm
- ❖ Backlight Compensation for Image Correction
- ❖ High Speed, Long Distance and Real Time Transmission
- ❖ Auto Color to Black and White at Low Illumination
- ❖ Support ICR switch, True Day / Night, Digital WDR
- ❖ Support Noise Reduction Function
- ❖ IP67 Ingress Protection



Dimensions:

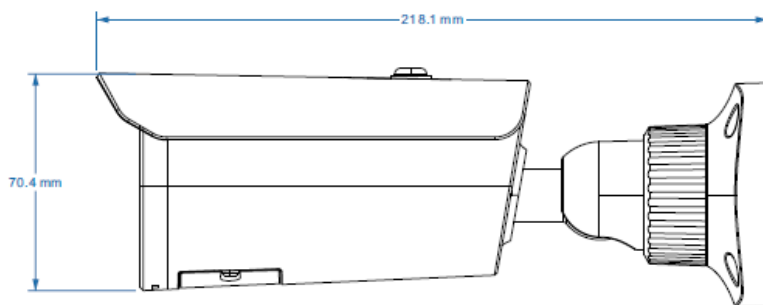

Specifications:

Model	PLC-325M-MZ-IR5/PM
Image Sensor	1 / 2.5 "CMOS
Resolution	5MP
Image Size	2560 x 1936
Video Output	AHD / TVI /CVI/CVBS
Image System	PAL / NTSC
Electronic Shutter	Auto
IR Distance	30 ~ 50 m
Frame Rate	5MP@20fps/4MP@30fps
Min. Illumination	Colour: 0.01 lux@F1.2, AGC ON; B/W: 0 lux with IR
Lens	2.8~12mm
Lens Mount	M12
S / N Ratio	≥52dB (AGC OFF)
Ingress Protection	IP 67
Function	Control OSD (COC Control)
Day & Night	ICR
Digital WDR	Yes
Digital NR	Yes, 2D DNR
Global Exposure	Yes
AGC	Yes
Auto White Balance	Yes
BLC	Yes
LSC	Yes
HLC	Yes
Sharpness	Yes
Mirror	Yes
Smart IR	Yes
Image Setting	Yes
Defect Correction	Auto
Language	13 languages
Angle Adjustment	Pan: 0°~360°; Tilt: 0°~90°; Rotation: 0°~360°
Power Supply	DC12V (± 10%)
Power Consumption	IR OFF: < 1W; IR ON: < 6W
Working Environment	- 30 °C ~ 50 °C, 10 % ~ 90 % (relative humidity)
Dimensions (mm)	217.7 x 80.5 x 80.5
Weight (net)	Approx. 0.57KG