



5 Megapixel Dual-Light FHD Bullet Camera

PLC-325P-AU-DL3/PM

www.pollo.net.au

info@pollo.net.au





Key Features:

- ❖ 1 / 2.5" CMOS Image Sensor
- ❖ 2560 x 1936 Pixels Super HD+2K Resolution
- ❖ 0.005 Lux Min. Illumination for Day Time Color View
- ❖ 30-meter Dual-Light Night View
- ❖ Smart Auto Switching to Night View Mode
- ❖ Built-in Microphone for Audio Capture
- ❖ Digital Noise Reduction
- ❖ Digital Wide Dynamic Range
- ❖ Backlight Compensation for Image Correction
- ❖ AHD / TVI / CVI / CVBS Standard Video Output
- ❖ Support OSD Menu
- ❖ IP67 Waterproofing & Dust Proofing
- ❖ DC12V ($\pm 10\%$) Power Supply



Dimensions:

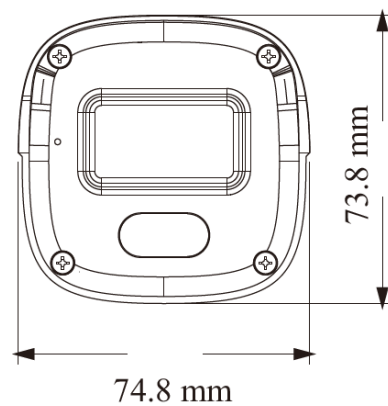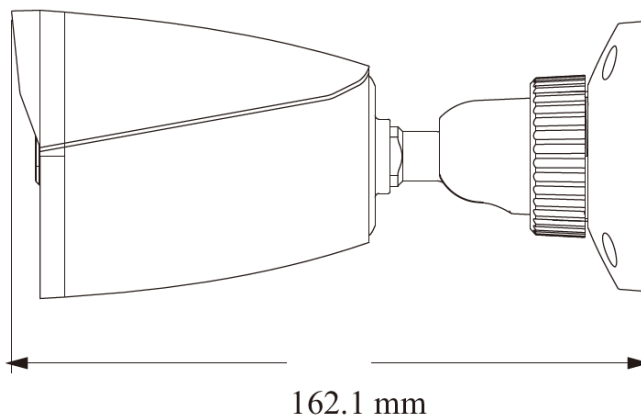

Specifications:

Model	PLC-325P-AU-DL3/PM
Image Sensor	1 / 2.5 "CMOS
Resolution	5MP
Image Size	2944 x 1656
Video Output	AHD / TVI /CVI/CVBS
Audio	1CH built-in MIC
Image System	PAL / NTSC
Electronic Shutter	Auto
View Distance	IR range: 20 ~30 m; White light range: up to 30m
Frame Rate	TVI:2944×1656@20fps, 2560×1440@25/30fps AHD:2944×1656@20fps, 2560×1440@25/30fps CVI:2560×1440@25/30fps CVBS:PAL/NSTC
Min. Illumination	0.005lux F1.2, AGC ON; 0 lux (LED ON)
Lens	2.8 mm
Lens Mount	M12
S / N Ratio	≥52dB (AGC OFF)
Ingress Protection	IP 67
Function Control	OSD (COC Control)
Digital WDR	Yes
Digital NR	Yes, 2D DNR (3D, only used with TVT'S DVRs)
AGC	Yes
Auto White Balance	Yes
BLC	Yes
Contrast	Yes
Saturation/Color Gain	Yes
Sharpness	Yes
Coaxial audio	Yes
Image Setting Yes	Yes
Defect Correction	Auto
Language	Chinese and English
Angle Adjustment	Pan: 0°~360°; Tilt: 0°~80°; Rotation: 0°~360°
Power Supply	DC12V (± 10%)
Power Consumption	LED OFF: < 1W; LED ON: < 4W
Working Environment	-10°C~40°C, 10%~90% (relative humidity)
Dimensions (mm)	162.1×74.8×73.8
Weight (Net) Approx.	0.25KG