




5 Megapixel Full Color FHD Bullet Camera

PLC-325P-AU-WR3/PM

www.pollo.net.au

info@pollo.net.au



Sensor



Min.
illumination



BLC



Full-Color



Auto WB




Sync



AGC



IP67


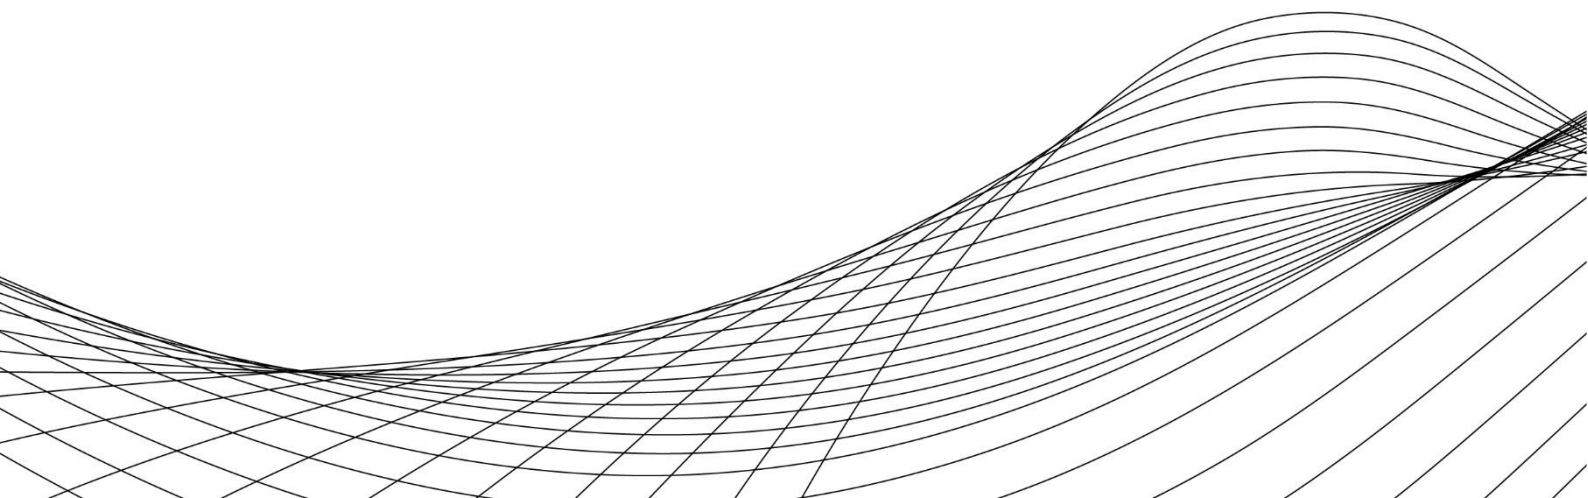


Key Features:

- ❖ 1 / 2.5" CMOS Image Sensor
- ❖ 2560 x 1936 Pixels Super HD+2K Resolution
- ❖ 0.005 Lux Min. Illumination for Day Time Color View
- ❖ 30-meter Full Color Night View
- ❖ Smart Auto Switching to Night View Mode
- ❖ Built-in Microphone for Audio Capture
- ❖ Digital Noise Reduction
- ❖ Digital Wide Dynamic Range
- ❖ Backlight Compensation for Image Correction
- ❖ AHD / TVI / CVI / CVBS Standard Video Output
- ❖ Support OSD Menu
- ❖ IP67 Waterproofing & Dust Proofing
- ❖ DC12V ($\pm 10\%$) Power Supply



Dimensions:

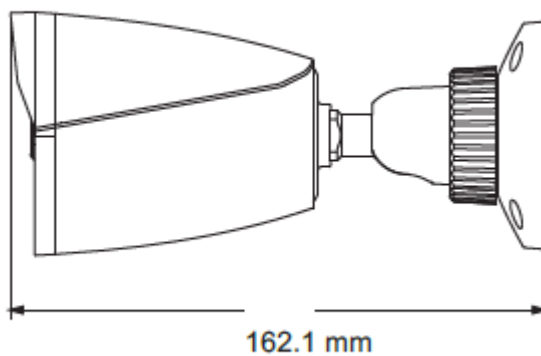

Specifications:

Model	PLC-325P-AU-WR3/PM
Image Sensor	1 / 2.5 "CMOS
Resolution	5MP
Image Size	2560 x 1936
Video Output	AHD / TVI /CVI
Image System	PAL / NTSC
Audio	Built in Mic
Electronic Shutter	Auto; 1/50s~1/000000s(P); 1/60s~1/100000s(N)
Night Color View Distance	20 ~30 m
Frame Rate	5MP@20fps/4MP@30fps
Min. Illumination	0 lux with LED ON
Lens	3.6 mm
Lens Mount	M12
S / N Ratio	≥52dB (AGC OFF)
Ingress Protection	IP 67
Function	OSD (COC Control)
Smart LED	Yes
Digital WDR	Yes
Digital NR	Yes, 2D DNR
Global Exposure	Yes
Central Exposure	Yes
AGC	Yes
Auto White Balance	Yes
BLC	Yes
Contrast	Yes
Sharpness	Yes
Image Setting	Yes
Defect Correction	Auto
Language	English
Angle Adjustment	Pan: 0°~360°; Tilt: 0°~80°; Rotation: 0°~360°
Power Supply	DC12V (± 10%)
Power Consumption	LED OFF: < 1.5W; LED ON: <3W
Working Environment	- 30 °C ~ 50 °C, 10 % ~ 90 % (relative humidity)
Dimensions (mm)	165.7 x 69 x 69
Weight (net)	Approx. 0.37KG