




8 Megapixel IR FHD Bullet Camera

PLC-328M-IR3/PM

www.pollo.net.au

info@pollo.net.au



Sensor



Min.
illumination



BLC



Day&Night




Auto WB



Sync



IP67


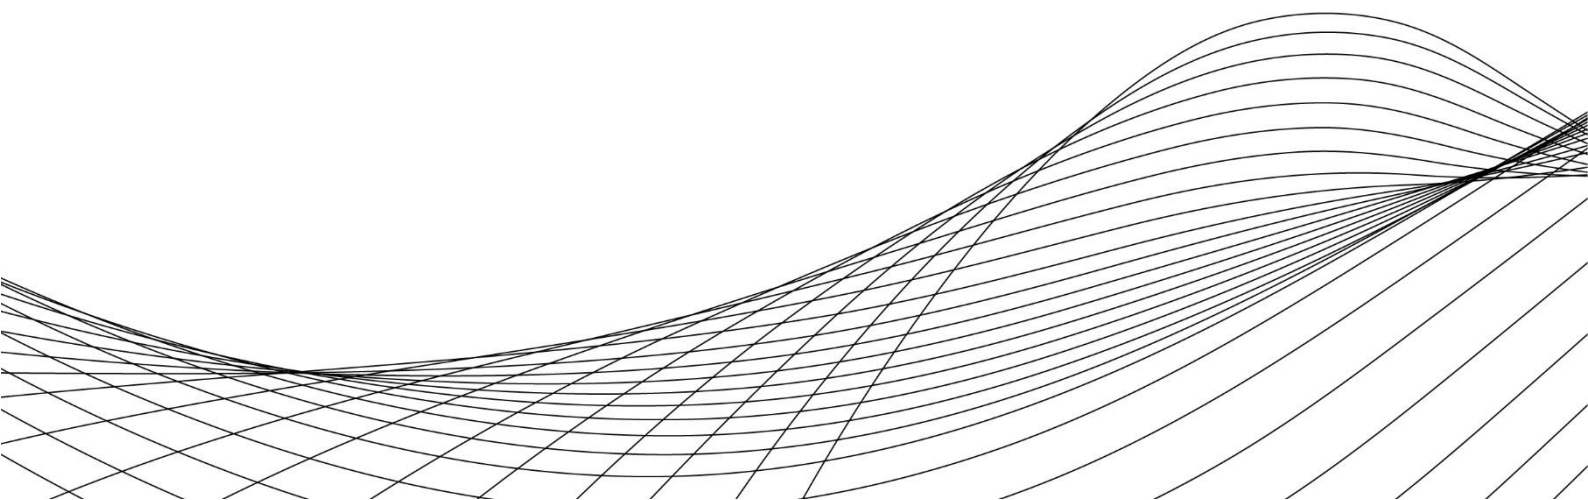


Key Features:

- ❖ 1 / 2.5" CMOS Image Sensor
- ❖ 3840x2160 Pixels Super 4K Resolution
- ❖ 0.01 Lux Min. Illumination for Day Time Color View
- ❖ 30-meter IR Night View Range
- ❖ Smart Auto Switching to Night View Mode
- ❖ Digital Noise Reduction
- ❖ Digital Wide Dynamic Range
- ❖ Backlight Compensation for Image Correction
- ❖ AHD / TVI / CVI / CVBS Standard Video Output
- ❖ Support OSD Menu
- ❖ IP67 Waterproofing & Dust Proofing
- ❖ DC12V ($\pm 10\%$) Power Supply



Dimensions:

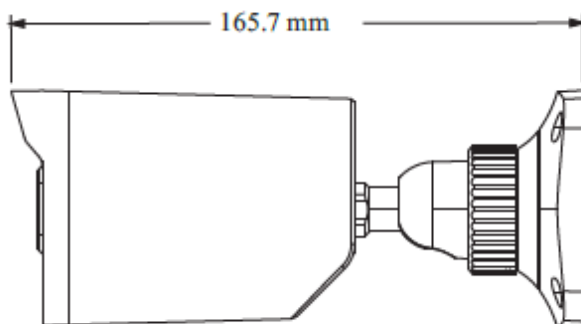

Specifications:

Model	PLC-328M-IR3/PM
Image Sensor	1 / 2.5 "CMOS
Resolution	8MP@15fps (Max)
Image Size	3840x2160
Video Output	AHD / TVI / CVI / CVBS
Image System	PAL / NTSC
Electronic Shutter	Auto
IR Distance	20 ~ 30 m
Frame Rate	15fps(60Hz), 12.5fps(50Hz)
Min. Illumination	Color: 0.01 lux@F1.2, AGC ON; B/W: 0 lux with IR
Lens	3.6 mm
Lens Mount	M12
S / N Ratio	≥52dB (AGC OFF)
Ingress Protection	IP 67
Function Control	OSD (COC Control)
Day & Night	ICR
Digital WDR	Yes
Digital NR	Yes
AGC	Yes
Auto White Balance	Yes
BLC	Yes
Defog	No
LSC	No
HLC	No
Sharpness	Yes
Mirror	No
Smart IR	No
Image Setting	Yes
Defect Correction	Auto
Language	English
Angle Adjustment	Pan: 0°~360°; Tilt: 0°~90°; Rotation: 0°~360°
Power Supply	DC12V (± 10%)
Power Consumption	IR OFF: < 1W; IR ON: < 4W
Working Environment	- 30 °C ~ 50 °C, 10 % ~ 90 % (humidity)
Dimensions (mm)	167.5 x 74. 5 x 74. 5
Weight (net)	Approx. 0.37KG