




## 2 Megapixel Full Color FHD Dome Camera

**PLC-332P-AU-WR3/PM**

[www.pollo.net.au](http://www.pollo.net.au)

[info@pollo.net.au](mailto:info@pollo.net.au)



Sensor



BLC



DWDR



Full-Color



Day&Night



Auto WB



Sync



AGC





IP67

## Key Features:

- ❖ 1 / 2.8" CMOS Image Sensor
- ❖ 1920 x 1080 Pixels Full HD Resolution
- ❖ 0.005 Lux Min. Illumination for Day Time Color View
- ❖ 30-meter Full Color Night View
- ❖ Smart Auto Switching to Night View Mode
- ❖ Built-in Microphone for Audio Capture
- ❖ Digital Noise Reduction
- ❖ Digital Wide Dynamic Range
- ❖ Backlight Compensation for Image Correction
- ❖ AHD / TVI / CVI / CVBS Standard Video Output
- ❖ Support OSD Menu
- ❖ IP67 Waterproofing & Dust Proofing
- ❖ DC12V ( $\pm 10\%$ ) Power Supply



## Dimensions:

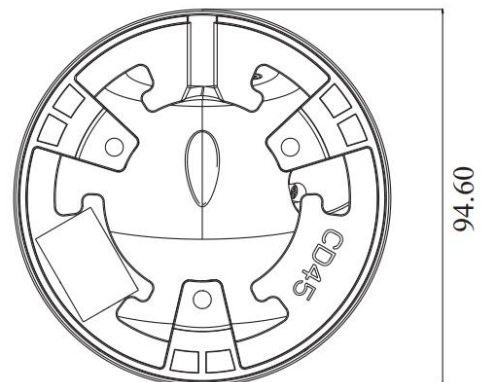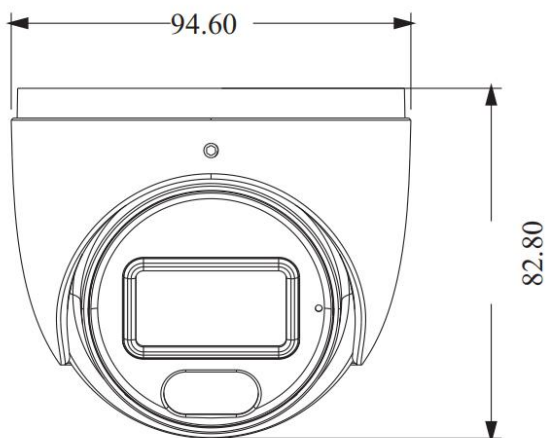

## Specifications:

|                     |                                                  |
|---------------------|--------------------------------------------------|
| Model               | PLC-332P-AU-WR3/PM                               |
| Image Sensor        | 1 / 2.8 "CMOS                                    |
| Resolution          | 2MP                                              |
| Image Size          | 1920 x 1080                                      |
| Video Output        | AHD / TVI /CVI/CVBS                              |
| Image System        | PAL / NTSC                                       |
| Audio               | Built in Mic                                     |
| Electronic Shutter  | Auto                                             |
| LED Distance        | 20 ~30 m                                         |
| Frame Rate          | 30fps(60Hz); 25fps (50Hz)                        |
| Min. Illumination   | 0 lux (LED ON)                                   |
| Lens                | 2.8mm                                            |
| Lens Mount          | M12                                              |
| S / N Ratio         | ≥52dB (AGC OFF)                                  |
| Ingress Protection  | IP 67                                            |
| Function Control    | OSD (COC Control)                                |
| Smart LED           | Manual or Auto mode                              |
| ICR                 | NO                                               |
| Digital WDR         | Yes                                              |
| Digital DNR         | Yes, 2D DNR                                      |
| AGC                 | Yes                                              |
| Auto White Balance  | Yes                                              |
| BLC                 | Yes                                              |
| HLC                 | Yes                                              |
| Sharpness           | Yes                                              |
| Contrast            | Yes                                              |
| Image Setting       | Yes                                              |
| Defect Correction   | Auto                                             |
| Language            | Chinese and English                              |
| Angle Adjustment    | Pan: 0°~360°; Tilt: 0°~80°; Rotation: 0°~360°    |
| Power Supply        | DC12V (± 15%)                                    |
| Power Consumption   | LED OFF: < 1W; LED ON: < 4W                      |
| Working Environment | - 30 °C ~ 50 °C, 10 % ~ 90 % (relative humidity) |
| Dimensions (mm)     | 162.1× 74.8× 73.8                                |
| Weight (net)        | Approx. 0.37KG                                   |