



2 Megapixel IR FHD Dome Camera

PLC-332P-IR2/PM

www.pollo.net.au

info@pollo.net.au



Sensor



Min.
illumination



BLC



WDR



Day&Night




Auto WB



Sync



AGC


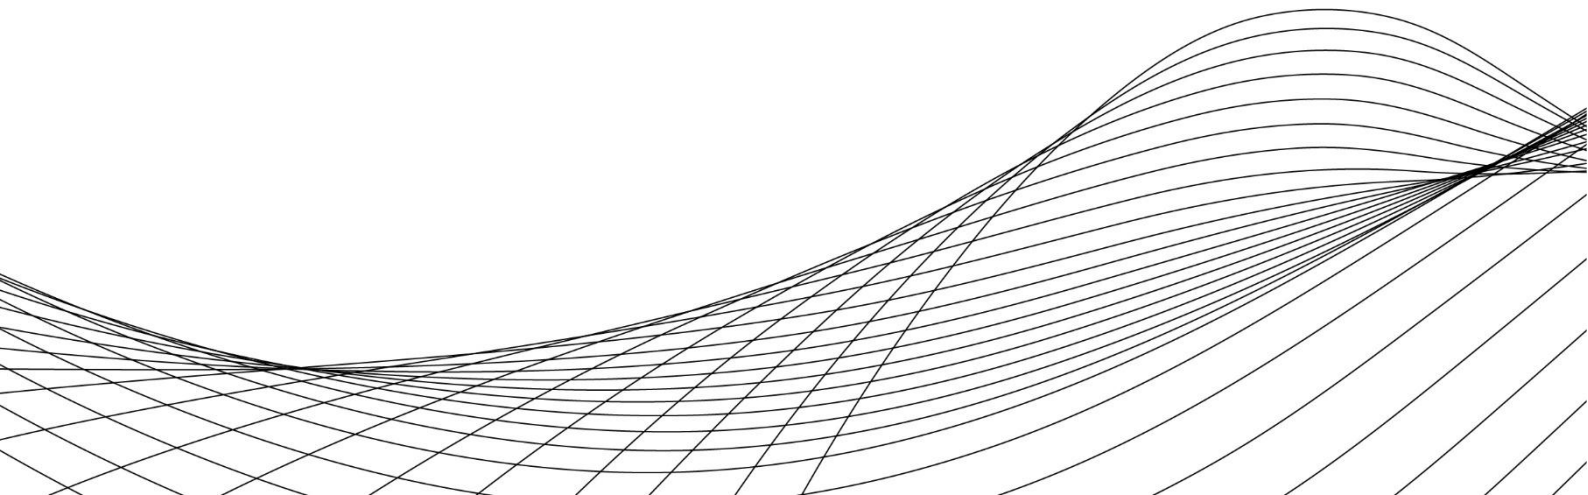


Key Features:

- ❖ 1 / 2.9" CMOS Image Sensor
- ❖ 1920 x 1080 Pixels Full HD Resolution
- ❖ 0.01 Lux Min. Illumination for Day Time Color View
- ❖ 20-meter IR Night View Range
- ❖ Smart Auto Switching to Night View Mode
- ❖ Digital Noise Reduction
- ❖ Digital Wide Dynamic Range
- ❖ Backlight Compensation for Image Correction
- ❖ AHD / TVI / CVI / CVBS Standard Video Output
- ❖ Support OSD Menu
- ❖ IP65 Waterproofing & Dust Proofing
- ❖ DC12V (±10%) Power Supply



Dimensions:

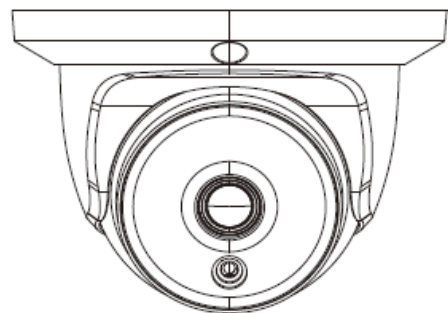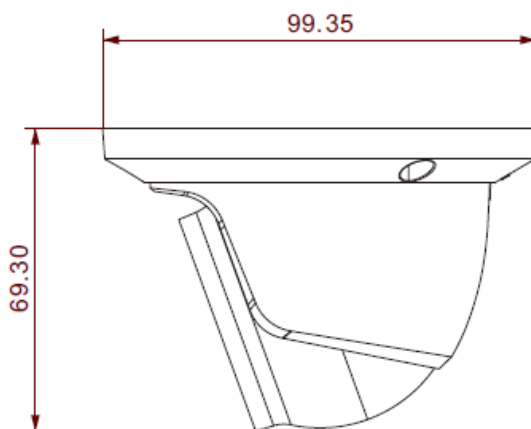

Specifications:

Model	PLC-332P-IR2/PM
Image Sensor	1 / 2.9"CMOS
Resolution	2MP
Image Size	1920 x 1080
Video Output	AHD / TVI /CVI/CVBS
Image System	PAL / NTSC
Electronic Shutter	Auto; 1 / 50s ~ 1 / 100000s (PAL); 1 / 60s ~ 1 / 100000s (NTSC)
IR Distance	10 ~20 m
Frame Rate	30fps(60Hz); 25fps (50Hz)
Min. Illumination	0 lux (IR ON)
Lens	2.8 mm
Lens Mount	M12
S / N Ratio	≥52dB (AGC OFF)
Function	Control OSD (COC Control)
Day & Night	ICR
Digital WDR	Yes
Digital NR	Yes
AGC	Yes
Auto White Balance	Yes
BLC	Yes
FLC	Yes
Defog	No
HLC	No
Sharpness	Yes
Mirror	Yes
Smart IR	Yes
Image Setting	Yes
Defect Correction	Auto
Language	Chinese and English
Angle Adjustment	Pan: 0°~360°; Tilt: 0°~90°; Rotation: 0°~360°
Power Supply	DC12V (± 10%)
Power Consumption	IR OFF: < 1W; IR ON: < 3W
Working Environment	- 30 °C ~ 50 °C, 10 % ~ 90 % (relative humidity)
Dimensions (mm)	Φ 65 x 144
Weight (net)	Approx. 0.15KG