




4 Megapixel Network Bullet Camera

PLC-424M-AU-IR5/PM

www.pollo.net.au

info@pollo.net.au


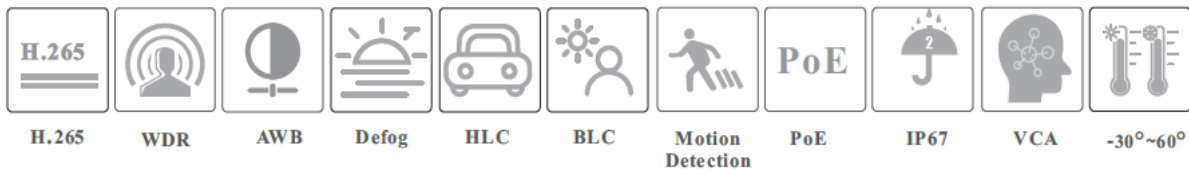


Key Features:

- ❖ 1/3 CMOS Image Sensor
- ❖ 2560×1440 Pixels (2K) Resolution
- ❖ 0.011 Lux Min. Illumination for Day Time Color View
- ❖ 50-meter IR Night View Range @ 0 Lux
- ❖ Motion Detection Alarm Trigger
- ❖ Line Crossing Detection
- ❖ Region Intrusion Detection
- ❖ Highlight Compensation for Image Correction
- ❖ Backlight Compensation for Image Correction
- ❖ ONVIF Protocol Supported
- ❖ IP67 Water & Dust Proofing
- ❖ DC12V/ PoE (IEEE802.3af) Power Supply



Dimensions:

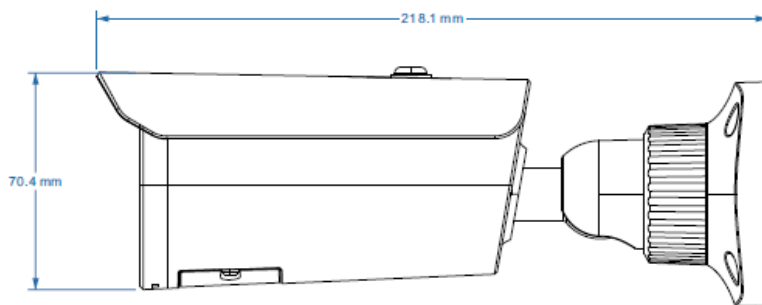

Specifications:

Model	PLC-424M-AU-IR5/PM
Image Sensor	1 / 3 "CMOS
Image Size	2560×1440
Electronic Shutter	1 / 2s ~ 1 / 100000 s
Iris Type	Fixed Iris
Min. Illumination	0.005 lux @F1.6, AGC ON; 0 lux with IR
Lens	2.8mm@F1.6, H.FoV:94°;V.FoV:50 °; D.FoV:115 ° 3.6mm@F1.6, H.FoV: 78 °; V.FoV:40°; D.FoV:97 ° 6mm@F1.6, H.FoV: 48 °; V.FoV:27 °; D.FoV:56°
Focus	Fixed
Lens Mount	M12
Day & Night	ICR
Wide Dynamic Range	120dB
BLC	Yes
HLC	Yes
Defog	No
Digital NR	Yes
Angle Adjustment	Pan: 0°~360°; Tilt:0°~90°; Rotation: 0°~360°
Video Compression	Main stream: H.265 / H.264 Sub/third stream: H.265 / H.264 / MJPEG
H.265 Compression Standard	Main Profile@Leve4.1 High Tier
Resolution	4MP (2560 × 1440), 3MP (2304 × 1296), 1080P (1920 × 1080),720P (1280 × 720), D1, 480× 240, CIF
Main Stream	60Hz: 4MP/3MP/1080P/720P(1~30fps); 50Hz: 4MP/3MP/1080P/720P(1~25fps)
Sub Stream	60Hz: 720P/D1/CIF (1~30fps);50Hz: 720P/D1/CIF (1~25fps)
Third Stream	60Hz: D1/480× 240/CIF (1~30fps);50Hz: D1/480× 240/CIF(1~25fps)
Bit Rate	64 Kbps ~ 8 Mbps
Bit Rate Type	VBR / CBR
Image Settings	ROI, Saturation, Brightness, Hue, Contrast, Wide Dynamic, Sharpness, Image Mirror, Image Flip, NR, etc. adjustable through client software or web browser
ROI	Each ROI to be configured separately
Network	RJ45
Video Output	No
Audio	1CH audio input
Storage	Built-in micro-SD card slot, up to 256GB
Reset	Yes
Remote Monitoring	Web browser /Pollo NVR/PVMS Plus /Pollo Live Plus mobile app
Web Browser	IE (plug-in required)/Google Chrome/Edge/Firefox/Safari
Online Connection	Support simultaneous monitoring for up to 3 users; Support multi-stream real time transmission

Network Protocol	UDP, IPv4, IPv6, DHCP, NTP, RTSP, RTP, RTCP, PPPoE, DDNS, SMTP, FTP, 802.1x, SNMP, UPnP, HTTP, HTTPS, QoS
Interface Protocol	ONVIF
Storage	Network remote storage; micro-SD card storage
Smart Alarm	Motion detection, SD card full, SD card error
Smart Event	Video Exception (scene change, video blur and video cast detection), line crossing detection and region intrusion detection
General Function	Watermark, IP address filtering, video mask, heartbeat, illegal login lock, corridor pattern
PoE	Yes
IR Distance	30 ~ 50 m
Ingress Protection	IP67
Power Supply	DC12V/PoE
Power Consumption	< 8W
Operating Environment	- 30 °C ~ 60 °C (-22°F~140°F); Humidity: less than 95 % (non-condensing)
Storage Environment	- 30 °C ~ 65°C (-22°F~149°F), Humidity: less than 95 % (non-condensing)
Dimensions (mm)	217.8 × 80.5 × 80.3
Weight (net)	Approx. 0.66KG
Installation	Ceiling mounting; Wall mounting
Certificate	CE, FCC
Environmental Protection	Complies with Directive EU RoHS, WEEE (2012/19/EU) , directive 94/62/EC and REACH(EC1907/2006)