




8 Megapixel Network Bullet Camera

PLC-438M-AUK-IR3/PM

www.pollo.net.au

info@pollo.net.au


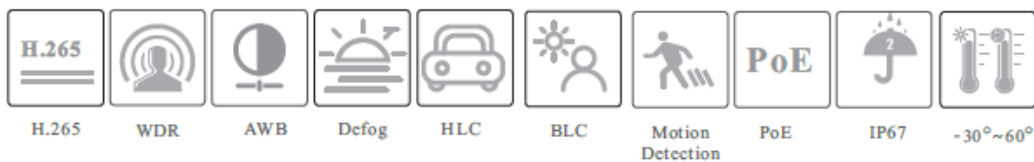


Key Features:

- ❖ 1/2.8" CMOS Image Sensor
- ❖ 3840x2160 Pixels Super 4K Resolution
- ❖ 0.02 Lux Min. Illumination for Day Time Color View
- ❖ 30-meter IR Night View Range @ 0 Lux
- ❖ Motion Detection Alarm Trigger
- ❖ Line Crossing Detection
- ❖ Region Intrusion Detection
- ❖ Highlight Compensation for Image Correction
- ❖ Backlight Compensation for Image Correction
- ❖ ONVIF Protocol Supported
- ❖ IP67 Water & Dust Proofing
- ❖ IK10 Vandal Proofing
- ❖ DC12V/ PoE (IEEE802.3af) Power Supply.



Dimensions:

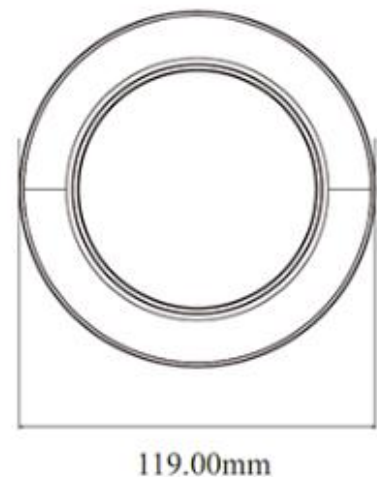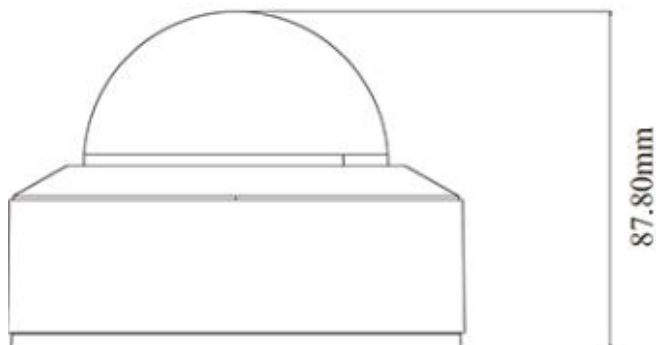

Specifications:

Model	PLC-438M-AUK-IR3/PM
Image Sensor	1 / 2.8" CMOS
Image Size	3840×2160
Electronic Shutter	1 s ~ 1 / 100000 s
Iris Type	Fixed Iris
Min. Illumination	0.02 lux @ F1.6, AGC ON; 0 lux with IR
Lens	2.8 mm @F1.6, Horizontal FoV:101°; Vertical FoV:53°; Diagonal FoV:120°
Focus	Fixed
Lens Mount	M12
Day&Night	ICR
Wide Dynamic Range	120dB
BLC	Yes
HLC	Yes
Defog	Yes
Digital NR	3D DNR
Angle Adjustment	Pan: 0°~360°; Tilt:0°~80°; Rotation: 0°~360°
Video Compression	H.265+ / H.265 / H.264+ / H.264 / MJPEG
H.264 Compression Standard	Baseline Profile/Main Profile/High Profile
Resolution	8MP (3840 × 2160), 6MP(3072 × 2048),5MP(2592 × 1944), 4MP (2560 × 1520), 2K(2560 × 1440), 3MP(2304 × 1296), 1080P (1920 × 1080), 720P (1280 × 720), D1, CIF, 480 × 240
Main Stream	60Hz : 8MP(1~20fps)/6MP/5MP/4MP/2K/3MP/1080P/720P(1~30fps) 50Hz : 8MP(1~20fps)/6MP/5MP/4MP/2K/3MP/1080P/720P(1~25fps)
Sub Stream	60Hz: 720P(1~12fps)/D1/480 × 240(1~30fps) 50Hz: 720P/D1/480 × 240(1~25fps)
Third Stream	60Hz: D1/CIF/480 × 240 (1~30fps) 50Hz: D1/CIF/480 × 240 (1~25fps)
Bit Rate	64 Kbps ~ 12 Mbps
Bit Rate Type	VBR / CBR
Audio Compression	G711A / U
Image Settings	ROI, Saturation, Brightness, Hue, Contrast, Wide Dynamic, image mirror, image flip, Sharpness, NR, etc. adjustable through client software or web browser
ROI	Each ROI to be configured separately
Network	RJ45
Video Output	No
Audio	1CH audio input
Storage	Built-in micro-SD card slot; up to 256GB
Reset	Yes
Remote Monitoring	IE browser/ PVMS Plus mobile APP
Online Connection	Support simultaneous monitoring for up to 10 users; Support multi-stream real time transmission

Network Protocol	UDP, IPv4, IPv6, DHCP, NTP, RTSP, RTP, RTCP, PPPoE, DDNS, SMTP, FTP, SNMP, HTTP, 802.1x, UPnP, HTTPs, QoS
Interface Protocol	ONVIF
Storage	Network remote storage; micro-SD card storage
Smart Alarm	Motion detection; SD card error; SD card full
Intelligent Analytics	Scene change, video blur detection, video color cast detection, line crossing detection, intrusion detection
General function	Watermark, IP address filtering, video mask, heartbeat, password protection, corridor pattern, etc.
IR Distance	20~30m
Protection Grade	IP 67, IK10
PoE	Yes (IEEE802.3af)
Power Supply	DC12V/PoE
Power Consumption	< 7W
Storage Conditions	- 30 °C ~ 65°C (-22°F~149°F), Humidity: less than 95 % (non-condensing)
Operating Conditions	- 30 °C ~ 60 °C (-22°F~140°F), Humidity: less than 95 % (non-condensing)
Dimensions (mm)	167.5 × 74.5 × 74.5
Weight (net)	Approx. 0.44KG
Installation	Ceiling mounting; Wall mounting
Certificate	CE, FCC
Environmental Protection	Complies with Directive EU RoHS, WEEE (2012/19/EU) , directive 94/62/EC and REACH(EC1907/2006)
Power Supply	DC12V/PoE
Power Consumption	< 9W
Storage Conditions	- 30 °C ~ 65°C (-22°F~149°F), Humidity: less than 95 % (non-condensing)
Operating Conditions	- 30 °C ~ 60 °C (-22°F~140°F), Humidity: less than 95 % (non-condensing)
Dimensions (mm)	Ø 119 × 87.8
Weight (net)	Approx. 0.64KG
Installation	Ceiling mounting; Wall mounting
Certificate	CE, FCC
Environmental Protection	Directive EU RoHS, WEEE(2012/19/EU) , directive 94/62/EC and REACH(EC1907/2006)