




6 Megapixel Fisheye Network Camera

PLC-486M-AU-IR3PM

www.pollo.net.au

info@pollo.net.au


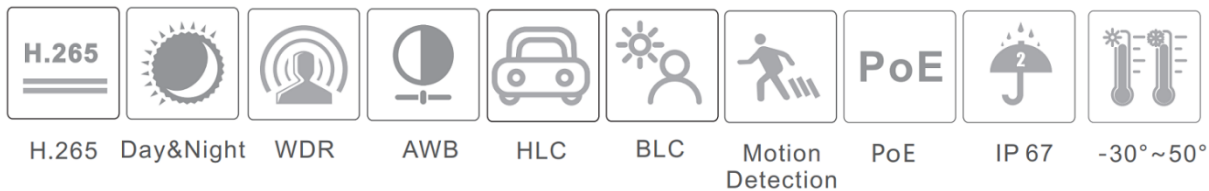


Key Features:

- ❖ 1/2.5" CMOS Image Sensor
- ❖ 3200×1800 Pixels (3K) Resolution
- ❖ 0.01 Lux Min. Illumination for Day Time Color View
- ❖ 30-meter IR Night View Range
- ❖ Motion Detection Alarm Trigger
- ❖ Line Crossing Detection
- ❖ Region Intrusion Detection
- ❖ Highlight Compensation for Image Correction
- ❖ Backlight Compensation for Image Correction
- ❖ ONVIF Protocol Supported
- ❖ IP67 Water & Dust Proofing
- ❖ PoE (IEEE802.3af)



Dimensions:

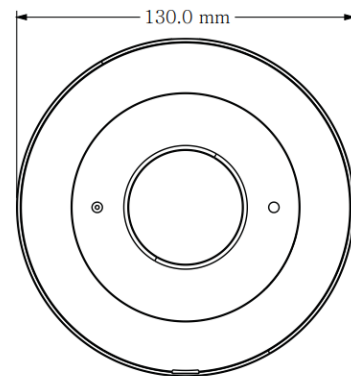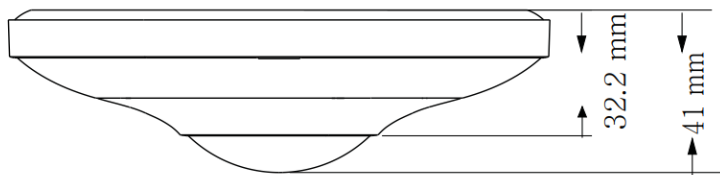

Specifications:

Model	PLC-486M-AU-IR3/PM
Image Sensor	1/2.5" Progressive Scan CMOS
Max. Resolution	3200×1800
Electronic Shutter	1/3s ~ 1/100000s
Min. Illumination	0.01 lux@F2.0, AGC ON; 0 lux with IR
IRIS	Fixed IRIS
Lens	1.65mm @F2.0, horizontal field of view : 180°(wall mounting), 360°(ceiling mounting), 360°(desktop)
WDR	120dB
S/N Ratio	≥ 50dB
BLC	Yes
HLC	Yes
Defog	Yes
Digital NR	3D NR
Video Compression	Main stream: H.265+ / H.265/ H.264+ / H.264 Sub stream: H.265+ / H.265/ H.264+ / H.264 MJPEG
H.264 Compression Standard	Baseline Profile/Main Profile/High Profile
	Mode1: Fisheye
	Fisheye view (main stream): 2160×2160/1440×1440/1080×1080 (50Hz: 1~25fps; 60Hz: 1~30fps)
	Fisheye view (sub stream): 960×960/720×720/480×480 (50Hz: 1~25fps; 60Hz: 1~30fps)
	Fisheye view (third stream): 640×640/360×360(50Hz: 1~25fps; 60Hz: 1~30fps)
	Mode2: Panoramic
	Panoramic view (main stream): 3200×1800/2560×1440/1920×1080 (50Hz:1~25fps; 60Hz:1~30fps)
	Panoramic view (sub stream): 1280×720/640×360 (50Hz:1~25fps; 60Hz:1~30fps)
	Panoramic view (third stream): 1280×720/640×360 (50Hz:1~25fps; 60Hz:1~30fps)
	Mode 3: Fisheye+Panoramic+3 PTZ
	Fisheye view (main stream): 2160×2160/1440×1440/1080×1080 (50Hz: 1~20fps; 60Hz: 1~20fps)
	Fisheye view (sub stream): 960×960/720×720/480×480 (50Hz: 1~20fps; 60Hz: 1~20fps)
	Fisheye view (third stream): 640×640/360×360(50Hz: 1~20fps; 60Hz: 1~20fps)
	Panoramic view (main stream): 3200×1800/2560×1440/1920×1080 (50Hz:1~20fps; 60Hz:1~20fps)
Main Stream	

	Panoramic view (sub stream): 1280×720/640×360 (50Hz:1~20fps; 60Hz:1~20fps)
	Panoramic view (third stream): 1280×720/640×360 (50Hz:1~20fps; 60Hz:1~20fps)
	3PTZ view: (1280×720/960×540/640×360) * 3 (50Hz:1~20fps; 60Hz: 1~20fps)
	Mode 4 : Fisheye+ 4 PTZ
	Fisheye view (main stream): 2160×2160/1440×1440/1080×1080 (50Hz: 1~25fps; 60Hz: 1~30fps)
	Fisheye view (sub stream): 960×960/720×720/480×480 (50Hz: 1~25fps; 60Hz: 1~30fps)
	Fisheye view (third stream): 640×640/360×360(50Hz: 1~25fps; 60Hz: 1~30fps)
	4PTZ view : (1280×720/960×540/640×360) * 4 (50Hz:1~25fps; 60Hz: 1~30fps)
	Mode5 : Fisheye+ 4 PTZ Fusion
	Fisheye view (main stream): 2160×2160/1440×1440/1080×1080 (50Hz: 1~25fps; 60Hz: 1~30fps)
	Fisheye view (sub stream): 960×960/720×720/480×480 (50Hz: 1~25fps; 60Hz: 1~30fps)
	Fisheye view (third stream): 640×640/360×360(50Hz: 1~25fps; 60Hz: 1~30fps)
	4PTZ fusion view (main stream): 2560×1440 (50Hz:1~20fps; 60Hz: 1~20fps)
	4PTZ fusion view (sub stream): 640×360 (50Hz:1~20fps; 60Hz: 1~20fps)
	4PTZ fusion view (third stream): 640×360 (50Hz:1~20fps; 60Hz: 1~20fps)
Bit Rate	64Kbps ~ 10Mbps
Bit Rate Type	VBR/CBR
Audio Compression	G711A / U
Image Settings	ROI, Saturation, Brightness, Hue, Contrast, Wide Dynamic, Sharpness, Image Flip, Image Mirror, NR, etc. adjustable through client software or web browser
ROI	8 ROI, each ROI to be configured separately
Network	1 CH RJ45 10 M/100 M self-adaptive Ethernet port
Video Output	CVBS (BNC × 1)
Audio	2CH Built-in MIC, 1 CH audio input, 1CH audio output
RS 485	Yes, half-duplex
Storage	Built-in micro SD card slot, up to 256GB
Reset	Yes
Alarm	1CH alarm input, 1CH alarm output
Remote Monitoring	Web Browser/PVMS Plus/NVR/mobile APP
Web Browser	Chrome 89.0+/Edge 89.0+/Firefox 87.0+/Safari 14.0+
Online Connection	Support simultaneous monitoring for up to 6 users; Support multi-stream real time transmission
Network Protocol	UDP, IPv4, IPv6, DHCP, NTP, RTSP, RTP, RTCP, RTMP, SNMP, PPPoE, DDNS, 802.1x, SMTP, FTP, UPnP, HTTPS, HTTP, QoS, P2P, HTTP POST
Interface Protocol	ONVIF Profile S/G/M

Intelligent Analytics	Mode 1/3/4/5 (ceiling mounting): (Human) region intrusion/region entrance/region exiting/line crossing/target counting by line, heat map ; Mode 2/3 (Wall mounting or desktop): Region intrusion/region entrance/region exiting/line crossing/target counting by line (human/motor vehicle/non-motor vehicle classification)
Smart Alarm	Motion detection, sensor alarm, SD card error, SD card full, IP address conflict, cable disconnection, audio alarm, audio alarm, audio exception
General function	Watermark, video mask, heartbeat, fisheye dewarping, system backup, disarming, cloud upgrade, ANR
Security	Video encryption, firmware encryption, HTTPS encryption, configuration encryption, illegal login lock, IP address filtering, 802.1x authentication, basic and digest authentication for HTTP/RTSP/API services
PoE	Yes, IEEE802.3af
IR Distance	20-30m
Ingress Protection	IP67
Power Supply	DC12V/PoE
Power Consumption	<10W
Working Environment	-30°C to 60 °C (-22°F to 140 °F). Humidity 95% or less (non-condensing)
Storage Environment	-30°C to 65 °C (-22°F to 149 °F). Humidity 95% or less (non-condensing)
Dimensions(mm)	φ130.6×46.3
Weight (net)	Approx. 516.2g
Installation	Wall mounting, ceiling mounting, desktop
Certificate	CE, FCC, UKCA
Environment Protection	Complies with Directive EU RoHS, WEEE(2012/19/EU) , directive 94/62/EC and REACH(EC1907/2006)