



SecurePad - Outdoor Video Access Control Terminal

PLC-VD2200/PM

www.pollo.net.au


info@pollo.net.au

Key Features:

- ❖ Full HD 1080P face recognition terminal with dual wide-angle lens
- ❖ 1/2.8" CMOS sensor with excellent low-light performance
- ❖ 120dB WDR, 2D/3D DNR, BLC, HLC & Defog support
- ❖ Ultra-wide field of view up to 170° diagonal
- ❖ Face detection, capture & comparison with high accuracy
- ❖ Supports face database up to 10,000 users
- ❖ Multiple access modes: Face / Card / Password / APP / Indoor station
- ❖ Supports IC & EM cards (13.56MHz & 125KHz)
- ❖ 3.5" built-in IPS screen for live preview and operation
- ❖ Mask detection & duress alarm supported
- ❖ Built-in microphone & speaker with noise cancellation
- ❖ Door access control integration (lock, exit button, door contact)
- ❖ Alarm I/O & anti-tamper protection
- ❖ Micro-SD storage up to 256GB
- ❖ PoE or DC12V power support
- ❖ Wi-Fi + Ethernet connectivity
- ❖ IP67 & IK04 protection for indoor/outdoor use
- ❖ Supports ONVIF, P2P & remote monitoring
- ❖ Multi-user online monitoring (up to 10 users)
- ❖ Compact wall-mount design



Dimensions:

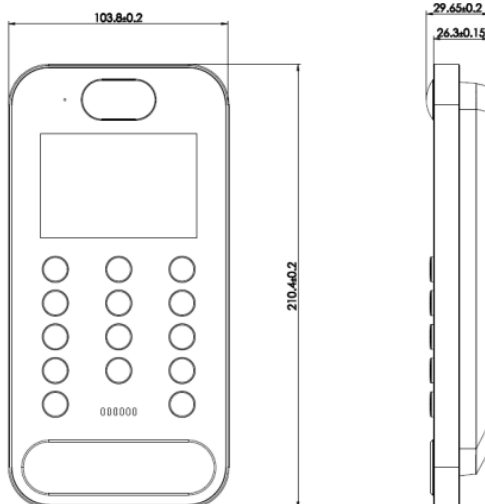

Specifications:

Model	PLC-VD2200/PM
Image Sensor	1/2.8" Progressive Scan CMOS
Image Size	1920×1080
Electronic Shutter	Auto/Manual; Manual:1/2s ~ 1/100000s
IRIS Type	Fixed IRIS
MIN. Illumination	Color: 0.0085lux@F1.2, AGC ON; B&W: 0 lux with IR
Lens	M8 HD dual lens: 2.3mm@F2.2 Vertical FOV: approx. 74°, Horizontal FOV: approx. 139°, Diagonal FOV: approx. 170°
WDR	120dB
S/N Ratio	≥50dB
BLC	Yes
HLC	Yes
Defog	Yes
DNR	2D/3D NR
Video Compression	Main stream: H.265+/H.265/H.264+/H.264 Sub/third stream: H.265+/H.265/H.264+/H.264/MJPEG
Compression Standard	Baseline Profile/Main Profile/High Profile
Bit rate Type	VBR/CBR
Bit Rate	64Kbps ~ 6Mbps
Resolution	1080P (1920×1080), 720P (1280×720), D1, CIF, 480×240
Main Stream	1920×1080/1280×720(60Hz: 1~30fps; 50Hz: 1~25fps)
Sub Stream	720P/D1/CIF (60Hz: 1~30fps; 50Hz: 1~25fps)
Third Stream	D1/CIF/480×240(60Hz: 1~30fps; 50Hz: 1~25fps)
Image Setting	Saturation, hue, brightness, contrast, wide dynamic range, sharpness, NR, etc., adjustable through client or web browser
Audio Compression	G711A/U
3.5 Inch ISP Screen	Resolution: 320 (RGB) ×480
Brightness	250cd/m2
Auto sleeping	Support auto wakeup when detecting a person or wakeup by pressing a button
Card Type	Mifare card /Desfire card/FM1208 Card/Gicard
Card Reading Protocol	ISO14443A/B protocol, EM41XX
Card Reading Frequency	13.56MHz & 125KHz
Card Reading Duration	<1s
Card Reading Distance	0~2cm
Card Capacity	10000
Network	RJ45(10/100 Base-T)
Audio	Built-in MIC×1, built-in speaker×1; support noise suppression and echo cancellation
Storage	1CH built-in micro-SD card, up to 256GB
Reset	Yes
RS485	Yes (for card reader or access control system access)

Wiegand Interface	Yes (Wiegand input or output configurable)
Alarm	2CH alarm input; 1CH alarm output
Door Lock Output	2CH
Door Contact Input	2CH
Exit Button	2CH
Anti-Tamper Interface	1CH
Swiping Card Area	Support IC card/EM card
Digital Buttons	Yes
Wi-Fi	Support 2.4G Wi-Fi function
Personal Properties	Face picture, ID number, list type(group), name, gender, age, phone number, card ID, password, door opening mode, note
Door Opening Modes	By face recognition/swiping card/password/indoor station/APP
Schedule	Yes
Mask Detection	Yes
Duress Function	Yes
Secondary Door Station	Yes
Capacity	50000 event items can be recorded
Remote Monitoring	Web client/indoor station/CMS remote control
Online Connection	Supports simultaneous monitoring for up to 10 users Supports multi-stream real time transmission
Network Protocol	UDP, IPv4, IPv6, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP, UPnP, HTTPS
Interface Protocol	ONVIF
Storage	Network remote storage, SD card storage cloud storage
Intelligent Analytics	SD card error, SD card full, IP address conflict, network disconnection
General Function	Watermark, IP address filtering, video mask, heartbeat, illegal login
PoE	Yes (802.3af)
P2P	Yes, turn on by default
IR Distance	0.3-2m
Protection Grade	IP67, IK04
Network Security	Video encryption, firmware encryption, configuration encryption, Digest, illegal login lock, IP address filtering, HTTPS, 802.1x
Intelligent Analytics	Face detection, face capture, face comparison
Face Detection	Pupil distance of a facial image over 20 pixels can be detected
Face Capture	Outputting the optimal face image by precise detecting, tracing, capturing, scoring and screening the moving faces
Original Image Capturing	Supports original image capturing and self-defined overlaid information (like device ID, time, etc.)
Face Picture Database	10000
Face Comparison Storage	Face pictures can be added, modified or deleted in the face database.
Face Picture Adding	Adding face pictures through WEB, face album manager tool
External Face Picture	Size: less than 70KB, JPG/JPEG format
Face Comparison Alarm	Face detection alarm, allow list, block list and stranger alarm
Power	DC12V/PoE

Power Consumption	< 12W
Environmental Protection	RoHS 2.0, REACH, WEEE, directive94/62/EC
Working Environment	-20°C~60°C, Humidity: less than 95% (non-condensing)
Dimensions(mm)	Approx. 210mm × 104mm ×30mm
Weight (net)	Approx. 0.6 kg
Installation	Wall Mounting