


Palm Pro - Visible Light Indoor Facial & Palm Recognition

PLF-5K-VLP

www.pollo.net.au

info@pollo.net.au

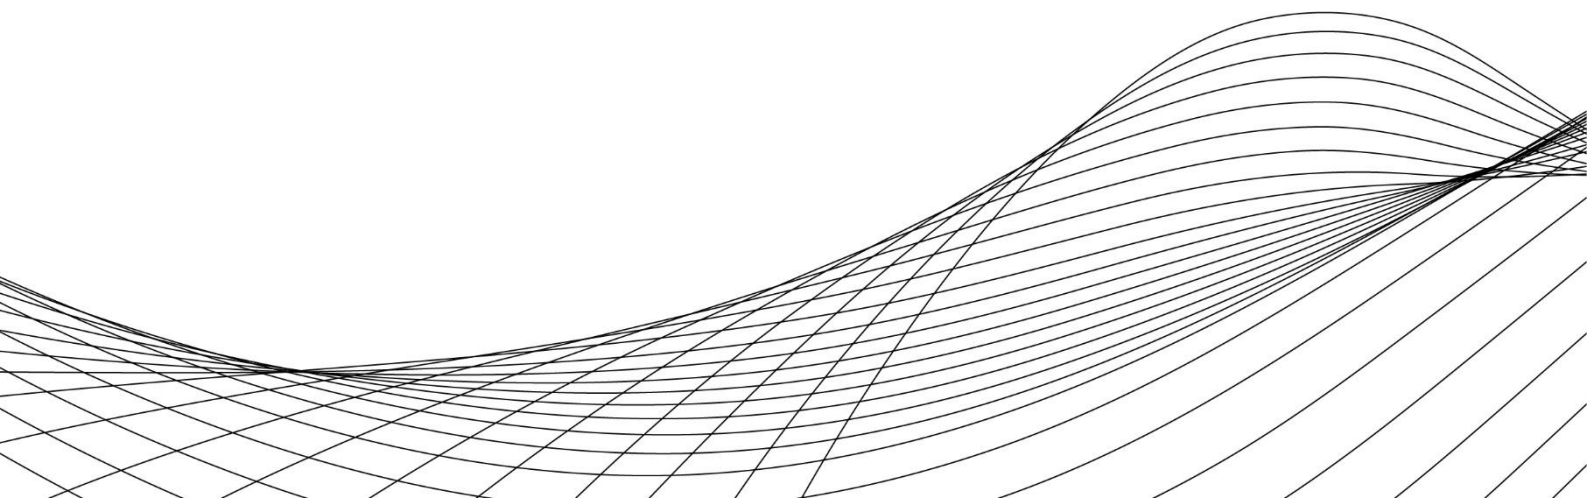

Palm Pro - Visible Light Indoor Facial & Palm Recognition PLF-5K-VLP



- ❖ Biometric access control terminal
- ❖ Dual-core 1.2GHz CPU with stable Linux operating system
- ❖ Equipped with 4.3-inch IPS LCD display for clear operation
- ❖ Features a dual (binocular) 1MP camera for accurate face and live detection
- ❖ Memory configuration includes 256MB RAM and 512MB ROM
- ❖ Supports identification through face, palm vein, fingerprint, card, and password
- ❖ User capacity of 5,000 users
- ❖ Supports 5,000 face templates
- ❖ Fingerprint capacity of 10,000 templates
- ❖ Palm vein capacity supports 1,000 users
- ❖ Stores up to 5,000 cards and passwords
- ❖ Large transaction storage with 200,000 logs
- ❖ Live detection technology to prevent photo or video spoofing
- ❖ Fast recognition speed of ≤ 0.3 seconds (1:N) for seamless access flow
- ❖ Effective recognition distance ranging from 0.5 to 2 meters
- ❖ Designed for indoor use, operating reliably between 0°C to 45°C
- ❖ Supports communication modes including TCP/IP, WiFi, and U-disk
- ❖ Built-in WiFi and support for LAN-based device deployment
- ❖ Supports Wiegand input/output and serial port
- ❖ Supports USB host/slave, and external card readers
- ❖ Advanced dynamic face detection and tracking algorithm
- ❖ Supports interface docking, customization, screen

Specifications:

Hardware	CPU	Dual-Core 1.2GHZ
	Operating system	LINUX
	LCD display	4.3" IPS 480*272
	Camera	Binocular camera (Dual) 1 Megapixel
	RAM	256MB
Capacity	ROM	512MB
	User	5,000
	Face	5,000
	Fingerprint	10,000
	Palm	1,000
Operating	Password	5,000
	Cards	5,000
	Logs	200,000
	Power supply	DC12V / 1A
	Identification Method	Face / Palm Vein / Fingerprint / Card / PWD
Communication	Feature	Live detection
	Recognition Time	≤ 0.3 second [1:N]
	Recognition distance	0.5 ~ 2M
	Operating temperature	0°C ~ 45°C
	Working humidity	20% ~ 90%RH
	Use environment	Indoor
	Communication mode	U disk, TCP/IP, WiFi
	Access Control Output	USB host, USB slave, ID card module, WiFi, Wiegand in & out